


LED Down light 260mm 10W COB LED-White

1. Product dimension:

SS-CL-260mm-COB-10W-WHT

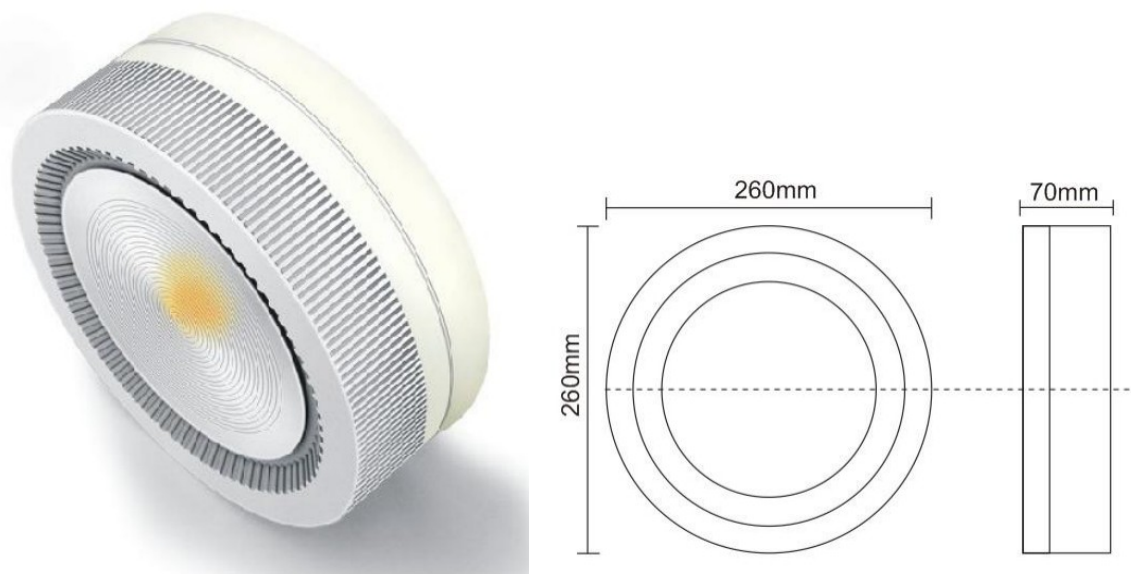

2. Key features

Product Type: LED Ceiling light

Base: 3PIN

Finish Colour: Silver

Net Weight: About 0.5 Kg

Beam angle: 180degree

Safety insurance: CE&RoHS

NO UV OR IR RADIATION

■DIMMABLE ■NON-DIMMABLE

RATED VOLTAGE: AC100-260V 50-60Hz/AC

RATED POWER: 10W $\pm 10\%$

POWER FACTOR: 0.9

OPERATING TEMPERATURE: $-10-40^{\circ}\text{C}$

SURFACE TEMPERATURE: $\leq 50^{\circ}\text{C}$

OPERATING HUMIDITY: 10—85%RH

DEGREE OF PROTECTION: IP65 OR IP20

3. Specification

Model	SS-CL-260mm-COB-10W-WHT
Power consumption:	10W

LED Type:	1 Pc COB
Efficiency(Lm/W):	60Lm/W
Color Temperature:	2700±100K 3500±100K(for WW) 4000±200K 5000±200K(for CW) 7000K±100K
Beam Angle:	180°
Input Voltage:	100-240V AC
CRI:	>80Ra
PFC:	>0.9
Working Temperature:	-5℃~+35℃
Dimension(mm):	Φ260×260×70mm
Net Weight	500g
Lifetime(Hr)	40000 Hours


Luminous Flux Tolerance: ±10%

Model	LED Qty:	Wattage(W)	Size:	Color	CCT:(K)	Luminous Flux(lumen)	Beam Ang	Power Factor	Life Time
SS-CL-260mm-COB-10W-WHT	1Pc COB	10W	Φ260×260×70mm	WW/NW/CW	2700±100K 3000±100K 4000±200K 5000±200K	600Lm(60Lm/W)	180°	>0.9	40,000Hrs


Photometric Curve:

(WW) 180°

Distribution Curve of Meridian

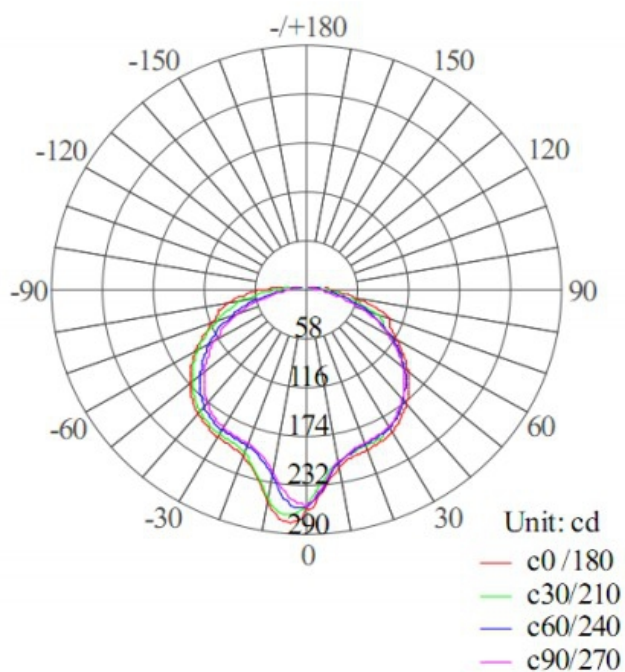


Illumination Cone Curve

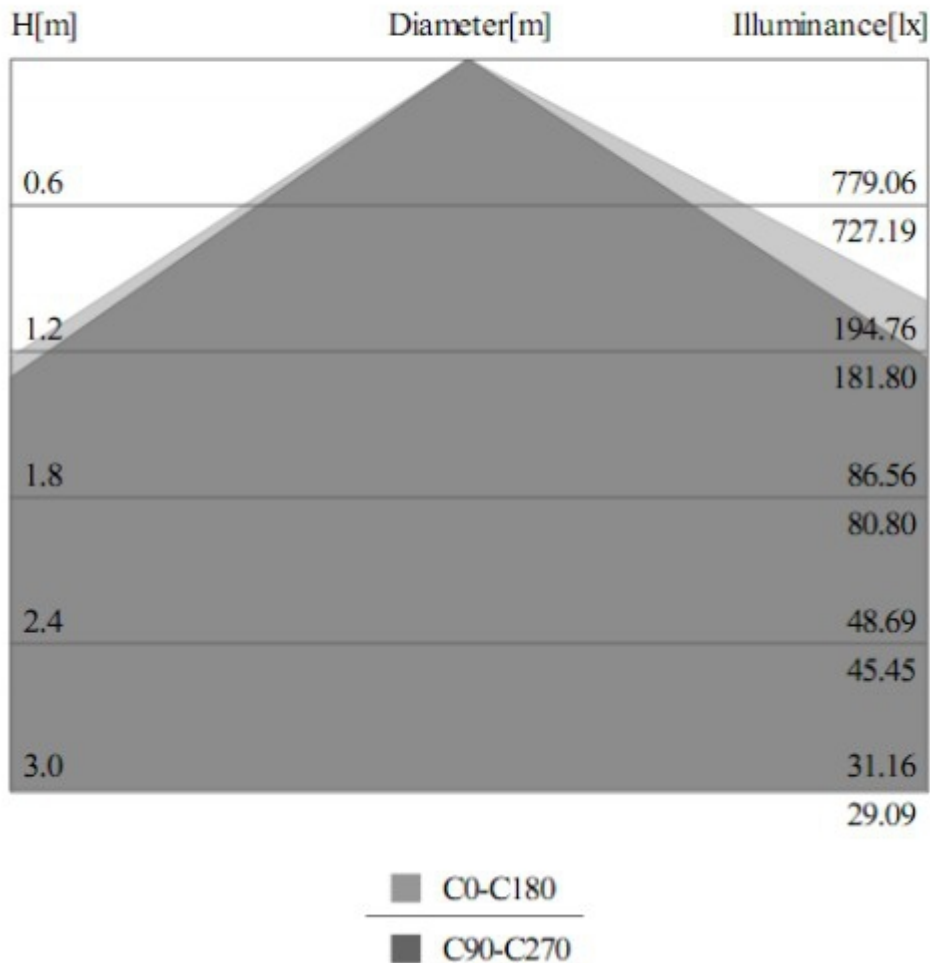

5. Application information

1. Replacement for traditional recessed lights
2. Ceiling light
3. Shopping center
4. Walkway
5. Hotel
6. Restaurant
7. Entertainment places
8. Display case
9. Museum
10. Household
11. Entertainment places

6. Package & Certification

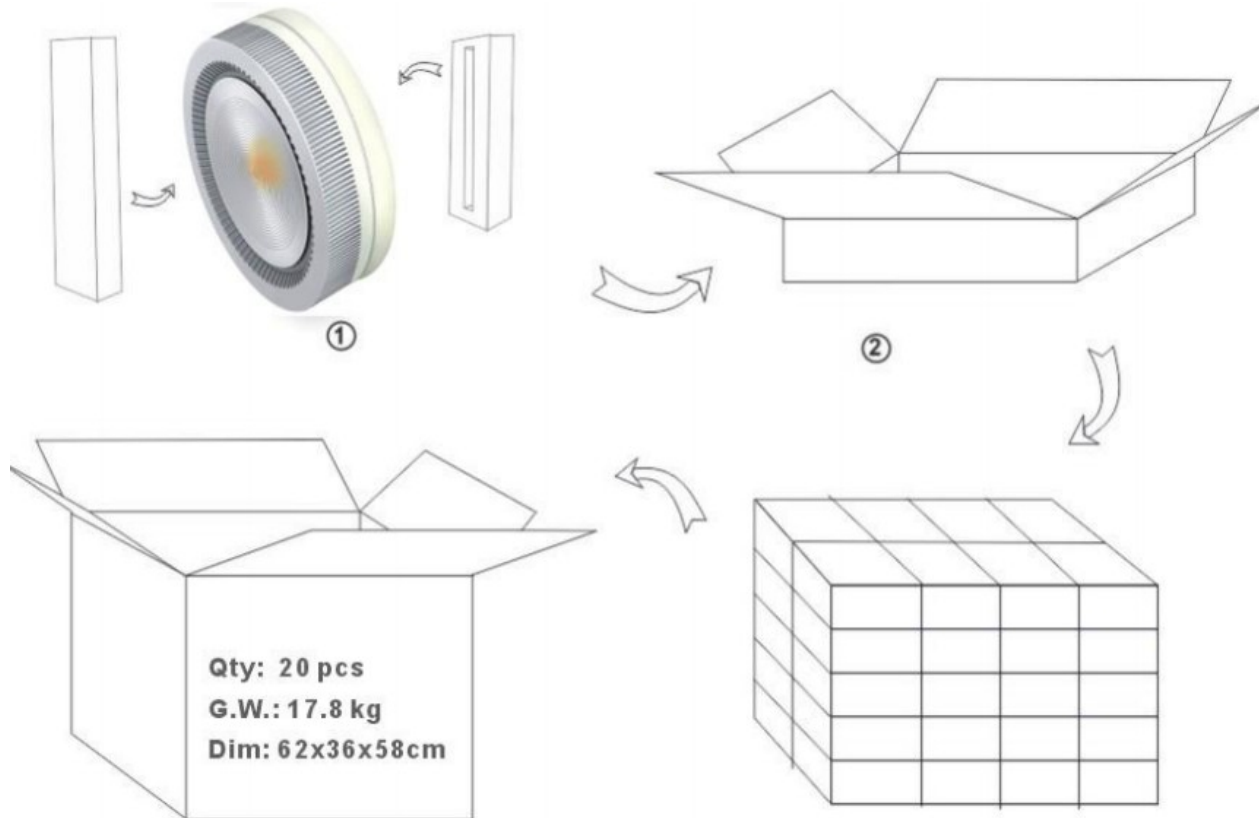

7. Caution

Suitable for wall and ceiling mounting, indoor using only
Only to be installed with qualified electrician
Kindly notice the power is off when installation
Supplied with LED and power supply
Not suitable for high temperature and moisture area.
Not suitable for heavy air-polluted area.
Not suitable for close system fixture.

8. Installation